


### Description

This reagent is a powdered, inorganic mineral formula used for the solidification of drill fluids. MF002 is made from a non-biodegradable material and will help waste to pass Paint Filter Test (PFT).

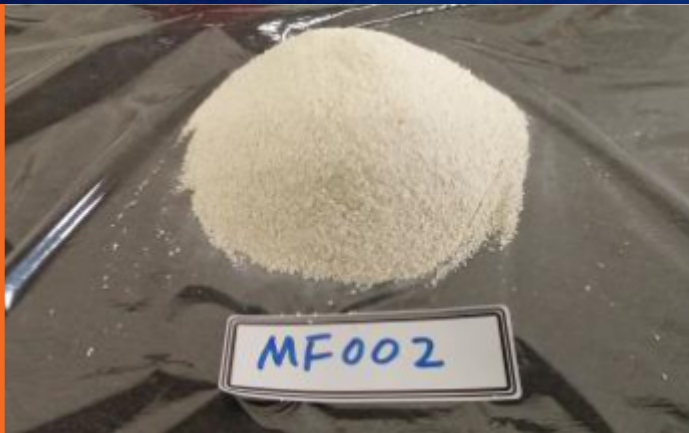

### Characteristics

Colour: Beige

Moisture Content: 6 - 9 %

Bulk Density (lbs/ft<sup>3</sup>): 55 ± 2

pH (5% dispersion): 6.5 – 8.5

Particle size: <4000 µm

### Benefits

- ✓ Can reduce weight and volume by as much as 20%.
- ✓ Immediately converts drill fluids to a solid (<30 min)
- ✓ Creates a dry, stackable solid for easy handling
- ✓ Help waste pass paint filter criteria
- ✓ Minimal humidity effects.
- ✓ Landfill friendly



Reduce  
Costs



Increase  
Safety



Environment  
Friendly

The information and data contained herein are believed to be accurate and reliable. MetaFLO Technologies makes no warranty of any kind and accepts no responsibility for the results obtained through application of this information. Product color on images may vary slightly.